



# Alfa Laval GJ 10

First choice in fuel storage tank cleaning

## Application

The Alfa Laval GJ 10 tank cleaning device fits through a 10.16 cm (4") opening and is capable of cleaning a 113.56 liter (30,000 gal) underground fuel storage tank with one insertion. This device blasts away contaminants and breaks up dirt and sludge in minutes. The Alfa Laval GJ 10 easily converts the contaminant-laden sludge into a solution which allows for complete liquid extraction and thorough tank cleaning. The device is part of the world-renowned Gamajet range of tank cleaning devices.

## Working principle

The Gamajet range of high impact tank cleaning devices combine pressure and flow to create high impact cleaning jets. Cleaning occurs at the point at which the concentrated stream impacts the surface. It is this impact and the tangential force that radiates from that point which blasts contaminants from the surface, scouring the tank interior. In conjunction with this impact, the device is engineered to rotate in a precise, repeatable and reliable, 360° pattern. This full-coverage, global indexing pattern ensures the entire tank interior is cleaned, every time.




## TECHNICAL DATA

Lubricant . . . . . Food grade  
Max. throw length . . . . . 10.5 m (35 ft.)


## Pressure

Working pressure . . . . . 2.75 - 20 bar (40 - 300 PSI)  
Recommended pressure . . . . . 3.5 - 18.5 bar (50 - 270 PSI)

## Cleaning Pattern



First Cycle



Full Pattern

The above drawings show the cleaning pattern achieved on a cylindrical horizontal vessel. The difference between the first cycle and the full pattern represents the number of additional cycles available to increase the density of the cleaning.

## Certificate

2.1 material certificate

## PHYSICAL DATA

### Materials

1.4404 (316L), PPS, FKM (EPDM and FFKM available)

### Temperature

Max. working temperature . . . . . 95°C (203°F)  
Max. ambient temperature . . . . . 140°C (284°F)

### Weight

. . . . . 4.3 kg (9.5 lbs.)

### Connections

Standard thread . . . . . 1½" NPT, 1½" BSP

### Options

Electronic rotation sensor to verify 3D coverage.


### Caution

Do not use for gas evacuation or air dispersion.




Disclaimer: Information in this product data leaflet is intended for general guidance purposes. Specific data for device selection and sizing is available upon request.

## Flow Rate

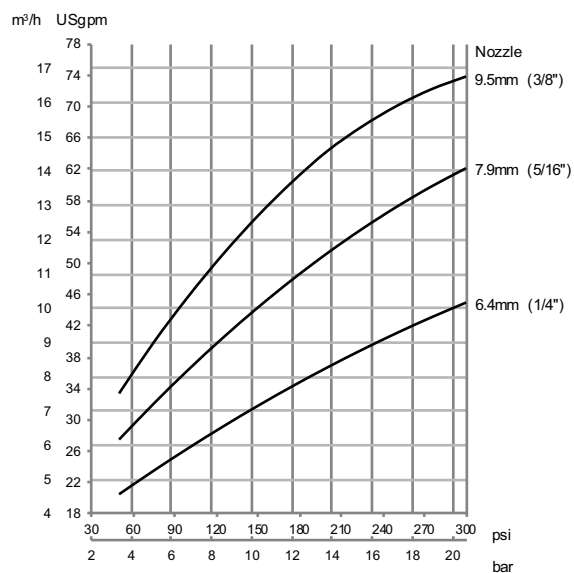

Inlet pressure


## Cleaning Time

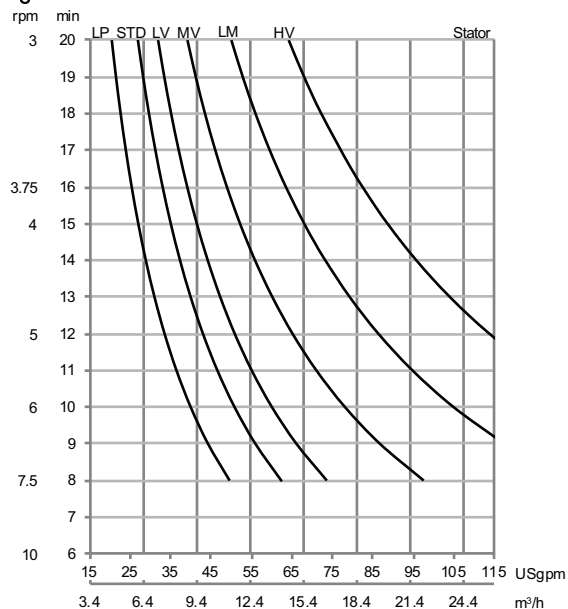

## Dimensions

	A	B	C	D	E	F	G
mm	272	204	93	42	98	100	138
in	10.7	8	3.7	1.7	3.9	3.9	5.4


## Impact Throw Length

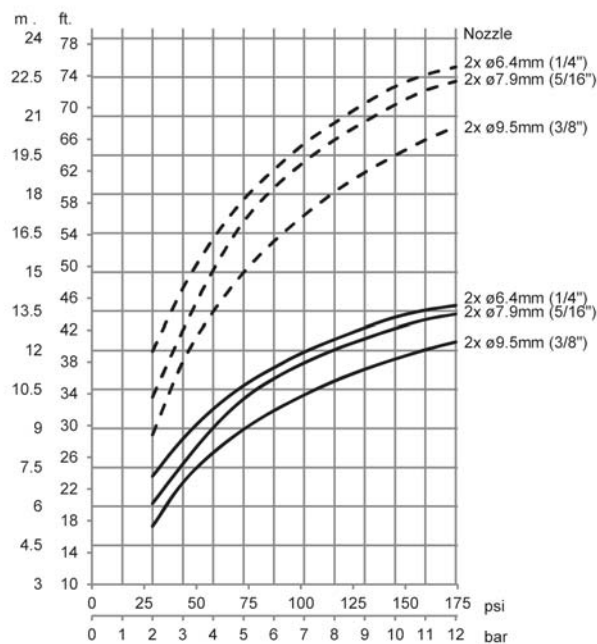

Inlet pressure

- - - Wetting, — Impact cleaning

## Dimensions

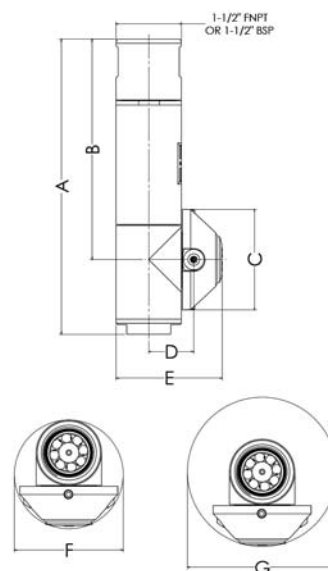


Standard Design

The choice of nozzle diameters can optimize jet impact length and flow rate at the desired pressure. As standard documentation, the Alfa Laval GJ 10 can be supplied with a “Declaration of Conformity” for material specifications.

TRAX simulation tool

TRAX is a unique software that simulates how the Alfa Laval GJ 10 performs in a specific tank or vessel. The simulation gives information on wetting intensity, pattern mesh width and cleaning jet velocity. This information is used to determine the best location of the tank cleaning device and the correct combination of flow, time, and pressure to implement. A TRAX demo containing different cleaning simulations covering a variety of applications can be used as a reference and documentation for tank cleaning applications. The TRAX demo is free and available upon request.

Wetting Intensity

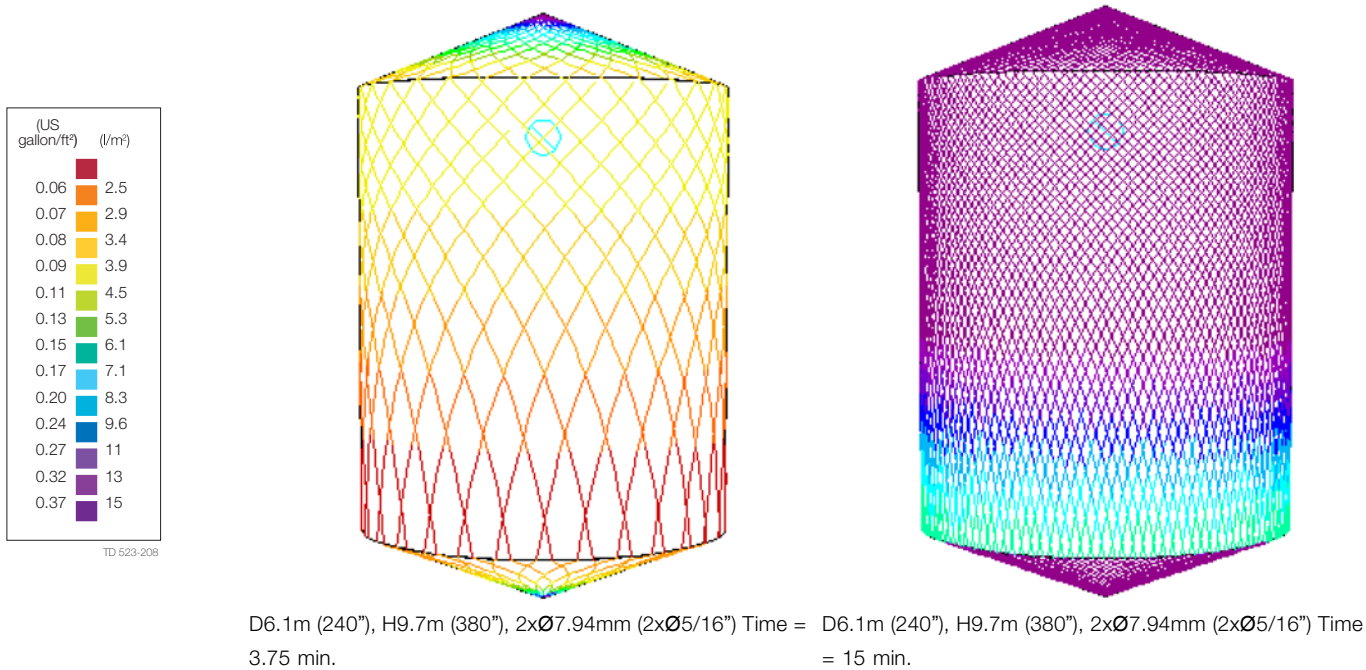

Alfa Laval reserves the right to change specifications without prior notification.

---

**How to contact Alfa Laval**

Contact details for all countries  
are continually updated on our website.  
Please visit [www.alfalaval.com](http://www.alfalaval.com) to  
access the information direct.