



# Low Flow Saves on Water and Chemicals

## Alfa Laval TJ MultiMagnum Rotary Spray Head

### Application

The Toftejorg MultiMagnum is a rotary spray head that uses cleaning media to provide coverage and impact. The device represents an effective alternative to traditional static spray balls because it uses low volumes of cleaning fluid at low pressure. The double ball bearing in the Toftejorg MultiMagnum's rotating head makes the device suitable for all industrial cleaning applications, including tanks, reactors, vessels and other containers ranging from 1,300 - 13,000 US gallons, depending on dimensions and cleaning task.

### Working principle

The flow of the cleaning media causes the head of the Toftejorg MultiMagnum to rotate, and the fan-shaped jets lay out a swirling pattern throughout the tank or reactor. This generates the impact needed for the efficient removal of residual product; the cascading flow covers all internal surfaces of the vessel. The MultiMagnum are designed to be installed in any given angle.




### TECHNICAL DATA

Lubricant: . . . . . Self-lubricating with the cleaning fluid  
 Wetting radius: . . . . . Max. 10 ft  
 Impact cleaning radius: . . . . . Max. effective 6 ft

### Pressure

Working pressure: . . . . . 14.5 - 44 PSI  
 Recommended pressure: . . . . . 29 PSI

### Spray Pattern

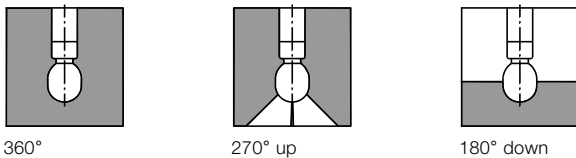

### Standard Design

As standard documentation, the Toftejorg MultiMagnum can be supplied with a "Declaration of Conformity" for material specifications.

### Certificates

2.1 material certificate.

### PHYSICAL DATA

#### Materials

Inlet connections/Balls: . . . . . 316 (UNS S31600)  
 Bearing race parts: . . . . . Duplex steel (UNS S31803)  
 Head: . . . . . 316 (UNS S31603)  
 Standard Surface finish: . . . . . Ra 32µin outside / Ra 32µin inside

#### Standard Surface finish:

exterior: . . . . . Ra 32µin  
 internal: . . . . . Ra 32µin

#### Temperature



Max. working temperature: . . . . . 203°F  
 Max. ambient temperature: . . . . . 284°F

#### Weight

Thread: . . . . . 1.98 lbs  
 On pipe: . . . . . 5.51 lbs


#### Connections

- Thread: 1 1/4" Rp (BSP) or NPT
- Weld-on: 1 1/2" ISO 2037 or DN40 DIN11850-R2

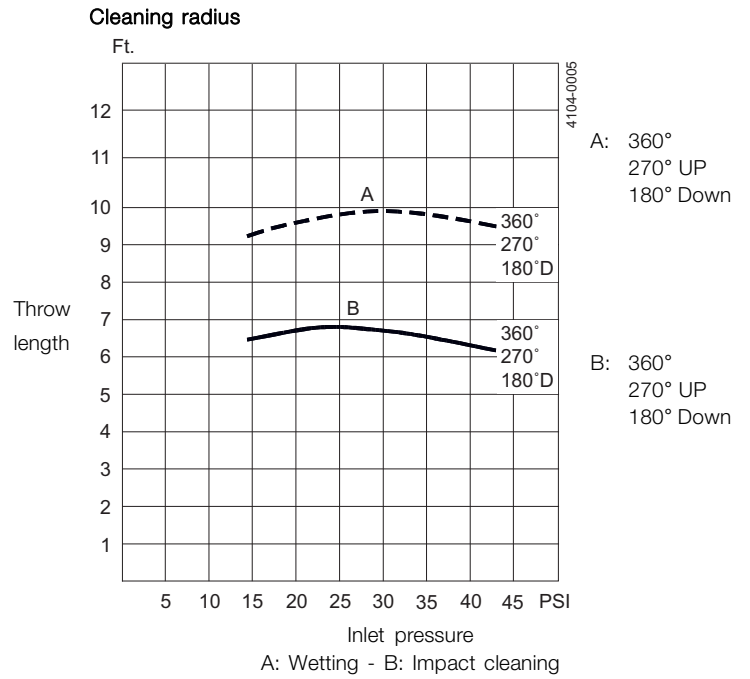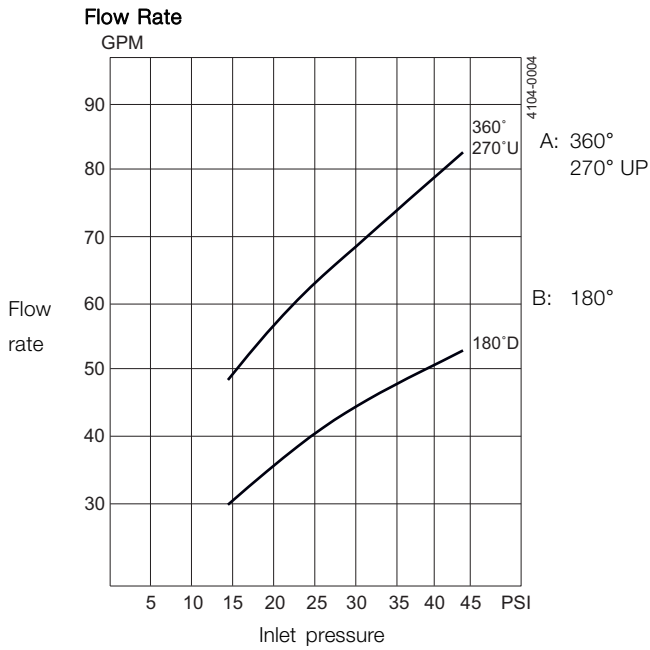


**Dimensions (inch)**

**Thread**

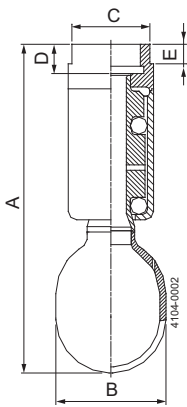

**TH**  
1 1/4" Rp (BSP)  
1 1/4" NPT

**Weld-on**

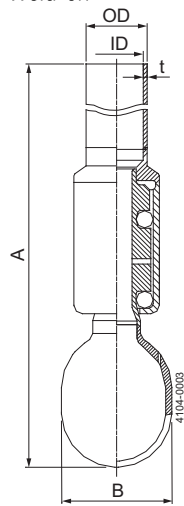

**OD x t**  
**Welded on pipe**  
ISO:  
DN40:

$\varnothing 1.50 \times 0.062$  inch  
 $\varnothing 1.61 \times 0.059$  inch

Type	A	B	C	D	E
Thread	7.20	$\varnothing 2.56$	1.81	0.63	0.59
Weld-on	39.37	$\varnothing 2.56$			

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE00329ENUS 1507

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.us](http://www.alfalaval.us) to access the information direct.